


DUCHESNE COUNTY MONUMENT SURVEY RECORD

T1S R2W
N 1/16
SEC 26 | SEC 25
U.S.B.&M.

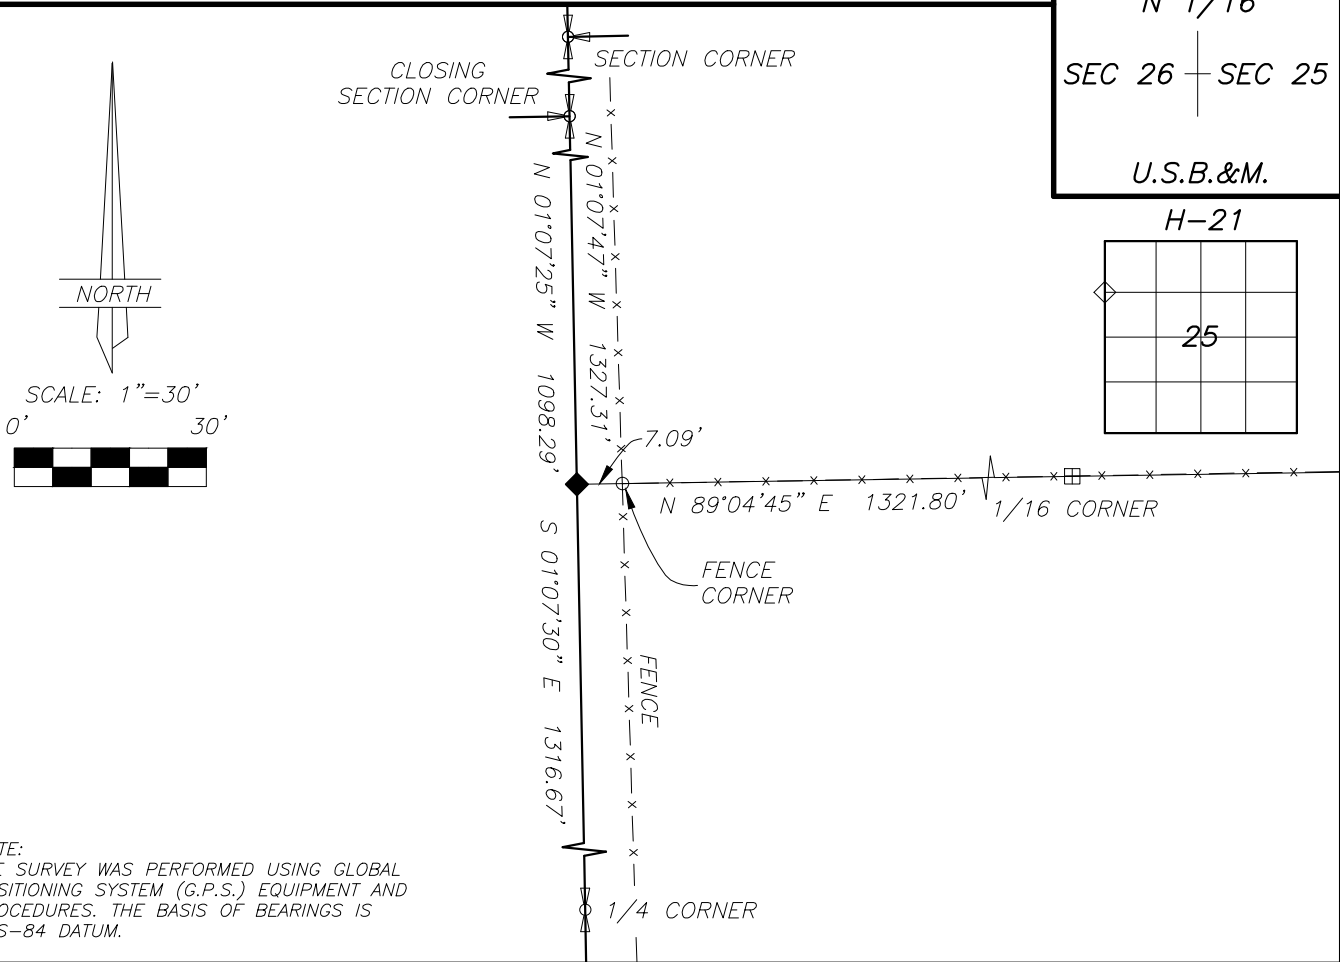

NOTE:
THE SURVEY WAS PERFORMED USING GLOBAL
POSITIONING SYSTEM (G.P.S.) EQUIPMENT AND
PROCEDURES. THE BASIS OF BEARINGS IS
WGS-84 DATUM.

DESCRIPTION OF CORNER EVIDENCE FOUND
POSITION OF CORNER WAS DETERMINED FROM DATA ON A PREVIOUS SURVEY

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE
THE ORIGINAL LOCATION OF THE CORNER
SET A MAG SPIKE WITH BRASS WASHER IN PAVEMENT AT 1/16 CORNER
REFERENCED AS SHOWN

STATE PLANE COORDINATE DATA
(U.S. SURVEY FEET)
NAD 83 UTAH CENTRAL ZONE
N: 7307037.88
E: 2039534.27

LATITUDE: 40°22'15.34772" N
LONGITUDE: 110°04'02.94705" W
PUBLIC LAND SURVEY SYSTEM GCDB ID NO. UT300010S0020W0_600262

CERTIFICATION
I Jerry D. Allred, Professional Land Surveyor, State of Utah, do
hereby certify that I have performed or reviewed the work done on the
diagrammed corner as reported on this recordation form and approve same
Date 17 JAN '17
Jerry D. Allred, Professional Land Surveyor
Certificate No. 148951
Duchesne County Surveyor

